

# segmentSeq: methods for identifying small RNA loci from high-throughput sequencing data

Thomas J. Hardcastle

January 19, 2012

## 1 Introduction

High-throughput sequencing technologies allow the production of large volumes of short sequences, which can be aligned to the genome to create a set of *matches* to the genome. By looking for regions of the genome which to which there are high densities of matches, we can infer a segmentation of the genome into regions of biological significance. The methods we propose allows the simultaneous segmentation of data from multiple samples, taking into account replicate data, in order to create a consensus segmentation. This has obvious applications in a number of classes of sequencing experiments, particularly in the discovery of small RNA loci and novel mRNA transcriptome discovery.

We approach the problem by considering a large set of potential *segments* upon the genome and counting the number of tags that match to that segment in multiple sequencing experiments (that may or may not contain replication). We then adapt the empirical Bayesian methods implemented in the `baySeq` package [1] to establish, for a given segment, the likelihood that the count data in that segment is similar to background levels, or that it is similar to the regions to the left or right of that segment. We then rank all the potential segments in order of increasing likelihood of similarity and reject those segments for which there is a high likelihood of similarity with the background or the regions to the left or right of the segment. This gives us a large list of overlapping segments. We reduce this list to identify non-overlapping loci by choosing, for a set of overlapping segments, the segment which has the lowest likelihood of similarity with either background or the regions to the left or right of that segment and rejecting all other segments that overlap with this segment. For fuller details of the method, see Hardcastle *et al.* [2].

## 2 Preparation

We begin by loading the `segmentSeq` package.

```
> library(segmentSeq)
```

Note that because the experiments that `segmentSeq` is designed to analyse are usually massive, we should use (if possible) parallel processing as implemented by the `snow` package. We therefore need to load the `snow` package (if it exists) and define a *cluster*.

```
> library(snow)
> cl <- makeCluster(7, "MPI")
```

If `snow` is not present, we can proceed anyway with a `NULL` cluster. Results may be slightly different depending on whether or not a cluster is used owing to the non-deterministic elements of the method.

```
> cl <- NULL
```

There is a convenience function, `readGeneric` which is able to read in tab-delimited files which have appropriate column names, and create an `alignmentData` object. Alternatively, if the appropriate column names are not present, we can specify which columns to use for the data. In either case, we pass a character vector of files, together with information on which data are to be treated as replicates to the function. We also need to define the lengths of the chromosome and specify the chromosome names as a character. The data here, drawn from text files in the 'data' directory of the `segmentSeq` package are taken from the first million bases of an alignment to chromosome 1 and the first five hundred thousand bases of an alignment to chromosome 2 of *Arabidopsis thaliana* in a sequencing experiment where libraries 'SL9' and 'SL10' are replicates, as are 'SL26' and 'SL32'. Libraries 'SL9' and 'SL10' are sequenced from an Argonaute 6 IP, while 'SL26' and 'SL32' are an Argonaute 4 IP.

```
> chrlens <- c(1e6, 2e5)
> datadir <- system.file("extdata", package = "segmentSeq")
> libfiles <- c("SL9.txt", "SL10.txt", "SL26.txt", "SL32.txt")
> libnames <- c("SL9", "SL10", "SL26", "SL32")
> replicates <- c("AG06", "AG06", "AG04", "AG04")
> aD <- readGeneric(files = libfiles, dir = datadir, replicates = replicates, libnames = libnames)
> aD
```

An object of class "alignmentData"  
13765 rows and 4 columns

Slot "alignments":

GRanges with 13765 ranges and 4 elementMetadata values:

	seqnames	ranges	strand	tag
	<Rle>	<IRanges>	<Rle>	<Rle>
[1]	>Chr1	[265, 284]	-	AAATGAAGATAAACCATCCA
[2]	>Chr1	[405, 427]	-	AAGGAGTAAGAATGACAATAAAT
[3]	>Chr1	[406, 420]	-	AAGAATGACAATAAAA
[4]	>Chr1	[600, 623]	+	AAGGATTGGTGGTTTGAAGACACA
[5]	>Chr1	[665, 688]	+	ATCCTTGTAGCACACATTTGGCA
[6]	>Chr1	[762, 785]	+	AGAGTGATTTGGATGATTCAAGAC
[7]	>Chr1	[762, 786]	+	AGAGTGATTTGGATGATTCAAGACT
[8]	>Chr1	[770, 789]	-	AGAAGTCTTGAATCATCCAA
[9]	>Chr1	[771, 789]	-	AGAAGTCTTGAATCATCCA
...	...	...	...	...
[13757]	>Chr2	[179944, 179961]	+	ATTTTCTCCTATGTAAGC
[13758]	>Chr2	[179958, 179981]	+	AAGCATAATGGTTCATGAATGGCT
[13759]	>Chr2	[179964, 179987]	-	AGAGAGAGCCATTCATGAACCATT

```

[13760] >Chr2 [179972, 179988] + | ATGAATGGCTCTCTCTA
[13761] >Chr2 [179972, 179993] + | ATGAATGGCTCTCTCTAGCGGA
[13762] >Chr2 [179978, 180000] - | GAGATTCTCCGCTAGAGAGAGCC
[13763] >Chr2 [179999, 180022] - | ATTAATATTAATTCATCGGGAAGA
[13764] >Chr2 [180002, 180022] - | ATTAATATTAATTCATCGGGA
[13765] >Chr2 [180014, 180037] + | AATATTAATGGTATTTGTGGAAAA

```

```

      matches chunk chunkDup
      <numeric> <Rle> <logical>
[1]          1      1      FALSE
[2]          1      1      FALSE
[3]          1      1      FALSE
[4]          1      1      FALSE
[5]          1      1      FALSE
[6]          1      1      FALSE
[7]          1      1      FALSE
[8]          1      1      FALSE
[9]          1      1      FALSE
...          ...      ...      ...
[13757]        1     279      FALSE
[13758]        1     279      FALSE
[13759]        1     279      FALSE
[13760]        1     279      FALSE
[13761]        1     279      FALSE
[13762]        1     279      FALSE
[13763]        1     279      FALSE
[13764]        1     279      FALSE
[13765]        1     279      FALSE
---
```

```

seqlengths:
  >Chr1 >Chr2
1000000 200000

```

```

Slot "data":
DataFrame with 5 rows and 4 columns
  SL9 SL10 SL26 SL32
  <Rle> <Rle> <Rle> <Rle>
1     1     0     0     0
2     0     0     0     2
3     0     1     0     0
4     0     1     0     0
5     7     1     0     0
13760 more rows...

```

```

Slot "libnames":
[1] "SL9" "SL10" "SL26" "SL32"

```

```

Slot "libsizes":
[1] 4447 6531 9666 6675

```

```

Slot "replicates":

```

```
[1] AG06 AG06 AG04 AG04
Levels: AG04 AG06
```

Next, we process this alignmentData object to produce a segData object. This segData object contains a set of potential segments on the genome defined by the start and end points of regions of overlapping alignments in the alignmentData object. It then evaluates the number of tags that hit in each of these segments.

```
> sD <- processAD(aD, cl = cl)
> sD
```

```
An object of class "segData"
17706 rows and 4 columns
```

```
Slot "data":
DataFrame with 5 rows and 4 columns
      SL9 SL10 SL26 SL32
  <Rle> <Rle> <Rle> <Rle>
1      1      0      0      0
2      1      1      0      2
3      1      2      0      2
4      8      3      0      2
5     31     29     51     85
17701 more rows...
```

```
Slot "libsizes":
[1] 4447 6531 9666 6675
```

```
Slot "replicates":
[1] AG06 AG06 AG04 AG04
Levels: AG04 AG06
```

```
Slot "coordinates":
GRanges with 17706 ranges and 0 elementMetadata values:
      seqnames      ranges strand
      <Rle>      <IRanges> <Rle>
[1]    >Chr1    [265, 284]     *
[2]    >Chr1    [265, 427]     *
[3]    >Chr1    [265, 623]     *
[4]    >Chr1    [265, 688]     *
[5]    >Chr1    [265, 830]     *
[6]    >Chr1    [265, 916]     *
[7]    >Chr1    [265, 967]     *
[8]    >Chr1    [405, 427]     *
[9]    >Chr1    [405, 623]     *
...      ...      ...
[17698] >Chr2 [178514, 178636] *
[17699] >Chr2 [178563, 178636] *
[17700] >Chr2 [179097, 179111] *
[17701] >Chr2 [179708, 179731] *
```

```

[17702] >Chr2 [179708, 179872] *
[17703] >Chr2 [179708, 180037] *
[17704] >Chr2 [179738, 179872] *
[17705] >Chr2 [179738, 180037] *
[17706] >Chr2 [179923, 180037] *
---
seqlengths:
  >Chr1  >Chr2
1000000 200000

```

We can now construct a segment map from these potential segments.

## Segmentation by Clustering

A fast method of segmentation can be achieved by exploiting the bimodality of the densities of small RNAs in the potential segments. In this approach, we assign each potential segment to one of two clusters for each replicate group, either as a segment or a null based on the density of sequence tags within that segment. We then combine these clusterings for each replicate group to gain a consensus segmentation map.

```
> clustSegs <- heuristicSeg(sD = sD, aD = aD, bimodality = FALSE, getLikes = TRUE, cl = cl
```

```
..
```

```
> clustSegs
```

```
GRanges with 774 ranges and 0 elementMetadata values:
```

	seqnames	ranges	strand
	<Rle>	<IRanges>	<Rle>
[1]	>Chr1	[ 1, 264]	*
[2]	>Chr1	[ 265, 284]	*
[3]	>Chr1	[ 285, 404]	*
[4]	>Chr1	[ 405, 427]	*
[5]	>Chr1	[ 428, 599]	*
[6]	>Chr1	[ 600, 626]	*
[7]	>Chr1	[ 627, 967]	*
[8]	>Chr1	[ 968, 2569]	*
[9]	>Chr1	[2570, 2593]	*
...	...	...	...
[766]	>Chr2	[176884, 177099]	*
[767]	>Chr2	[177100, 178343]	*
[768]	>Chr2	[178344, 178370]	*
[769]	>Chr2	[178371, 178636]	*
[770]	>Chr2	[178637, 179096]	*
[771]	>Chr2	[179097, 179111]	*
[772]	>Chr2	[179112, 179707]	*
[773]	>Chr2	[179708, 180037]	*
[774]	>Chr2	[180038, 200000]	*

```
---
```

```
seqlengths:
```

```

      >Chr1  >Chr2
      1000000 200000
An object of class "lociData"
774 rows and 4 columns

Slot "replicates"
[1] AG06 AG06 AG04 AG04
Levels: AG04 AG06

Slot "libsizes"
AG06.1 AG06.2 AG04.1 AG04.2
  4447   6531   9666   6675

Slot "groups":
[[1]]
[1] AG06 AG06 AG04 AG04
Levels: AG04 AG06

Slot "data":
      AG06.1 AG06.2 AG04.1 AG04.2
[1,]      0      0      0      0
[2,]      1      0      0      0
[3,]      0      0      0      0
[4,]      0      1      0      2
[5,]      0      0      0      0
769 more rows...

Slot "annotation":
data frame with 0 columns and 774 rows

Slot "locLikelihoods":
      AG04      AG06
[1,] 0.01451211 0.02129373
[2,] 0.07159889 0.81662143
[3,] 0.02437336 0.03891005
[4,] 0.41615355 0.79927895
[5,] 0.01914445 0.02856721
769 more rows...

```

## Segmentation by Classification

A more refined approach to the problem uses an existing segment map (or, if not provided, a segment map defined by the `clustSegs` function) to acquire empirical distributions on the density of sequence tags within a segment. We can then estimate posterior likelihoods for each potential segment as being either a true segment or a null. We then identifying all potential segments in the with a posterior likelihood of being a segment greater than some value 'locsens' and containing no subregion with a posterior likelihood of being a null greater than 'nulsens'. We then greedily select the longest segments satisfying these criteria

that do not overlap with any other such segments in defining our segmentation map.

```
> classSegs <- classifySeg(sD = sD, aD = aD, cD = clustSegs, subRegion = NULL, getLikes =
```

```
..
```

```
> classSegs
```

```
GRanges with 282 ranges and 0 elementMetadata values:
```

	seqnames	ranges	strand
	<Rle>	<IRanges>	<Rle>
[1]	>Chr1	[ 1, 599]	*
[2]	>Chr1	[ 600, 967]	*
[3]	>Chr1	[ 968, 17054]	*
[4]	>Chr1	[17055, 17530]	*
[5]	>Chr1	[17531, 18728]	*
[6]	>Chr1	[18729, 27656]	*
[7]	>Chr1	[27657, 27677]	*
[8]	>Chr1	[27678, 42216]	*
[9]	>Chr1	[42217, 42570]	*
...	...	...	...
[274]	>Chr2	[152878, 169195]	*
[275]	>Chr2	[169196, 169230]	*
[276]	>Chr2	[169231, 176811]	*
[277]	>Chr2	[176812, 176865]	*
[278]	>Chr2	[176866, 178343]	*
[279]	>Chr2	[178344, 178636]	*
[280]	>Chr2	[178637, 179707]	*
[281]	>Chr2	[179708, 180037]	*
[282]	>Chr2	[180038, 200000]	*

```
---
```

```
seqlengths:
```

```
>Chr1 >Chr2  
1000000 200000
```

```
An object of class "lociData"
```

```
282 rows and 4 columns
```

```
Slot "replicates"
```

```
[1] AG06 AG06 AG04 AG04
```

```
Levels: AG04 AG06
```

```
Slot "libsizes"
```

```
SL9 SL10 SL26 SL32  
4447 6531 9666 6675
```

```
Slot "groups":
```

```
[[1]]
```

```
[1] AG06 AG06 AG04 AG04
```

```
Levels: AG04 AG06
```

```
Slot "data":
      SL9 SL10 SL26 SL32
[1,]  1    1    0    2
[2,] 54   46   65   83
[3,]  2    3    0    0
[4,] 92   97  147  560
[5,] 590  524 1258  543
277 more rows...
```

```
Slot "annotation":
data frame with 0 columns and 282 rows
```

```
Slot "locLikelihoods":
      AG04      AG06
[1,] 0.11826568 0.06934290
[2,] 0.99259720 0.98854169
[3,] 0.03269643 0.03134216
[4,] 0.99796462 0.99491674
[5,] 0.99928941 0.99965444
277 more rows...
```

By one of these methods, we finally acquire an annotated `countData` object, with the annotations describing the co-ordinates of each segment.

We can use this `countData` object, in combination with the `alignmentData` object, to plot the segmented genome.

```
> par(mfrow = c(2,1), mar = c(2,6,2,2))
> plotGenome(aD, clustSegs, chr = ">Chr1", limits = c(1, 1e5), showNumber = FALSE, cap = 5
> plotGenome(aD, classSegs, chr = ">Chr1", limits = c(1, 1e5), showNumber = FALSE, cap = 5
```

This `countData` object can now be examined for differential expression with the `baySeq` package.

## References

- [1] Thomas J. Hardcastle and Krystyna A. Kelly. *baySeq: Empirical Bayesian Methods For Identifying Differential Expression In Sequence Count Data*. BMC Bioinformatics (2010)
- [2] Thomas J. Hardcastle and Krystyna A. Kelly and David C. Baulcombe. *Identifying small RNA loci from high-throughput sequencing data*. In press (2011)

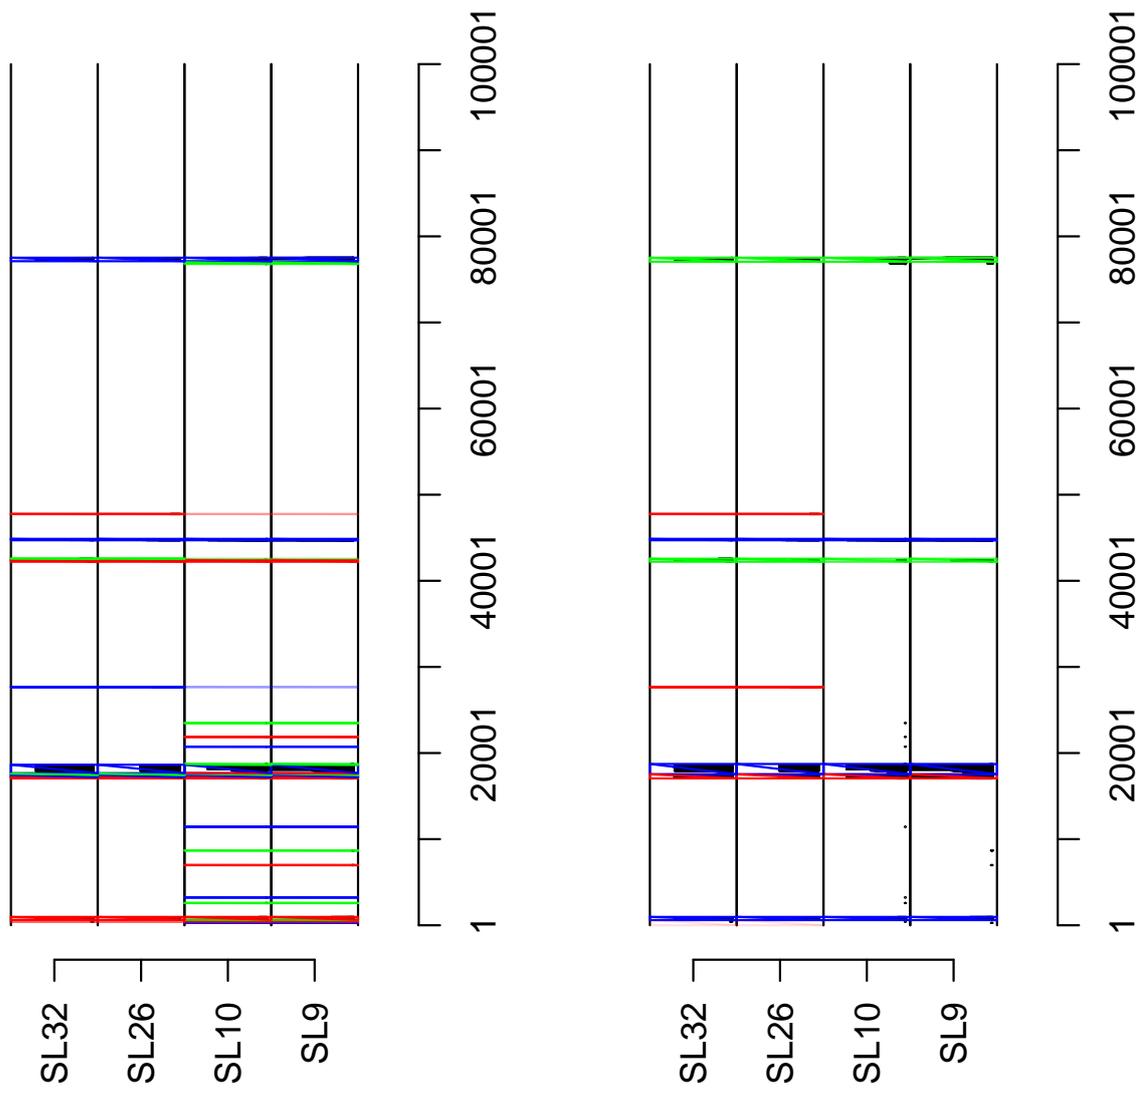


Figure 1: The segmented genome (first 10<sup>5</sup> bases of chromosome 1).